



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/02/05	A	ADDED MATERIAL SPECS	T.B.	B.S.	
05/14/05	B	ADDED TOTAL WIRE LENGTH	T.B.	B.S.	
02/29/08	C	ADDED " ROHS COMPLIANT"	T.B.	B.S.	

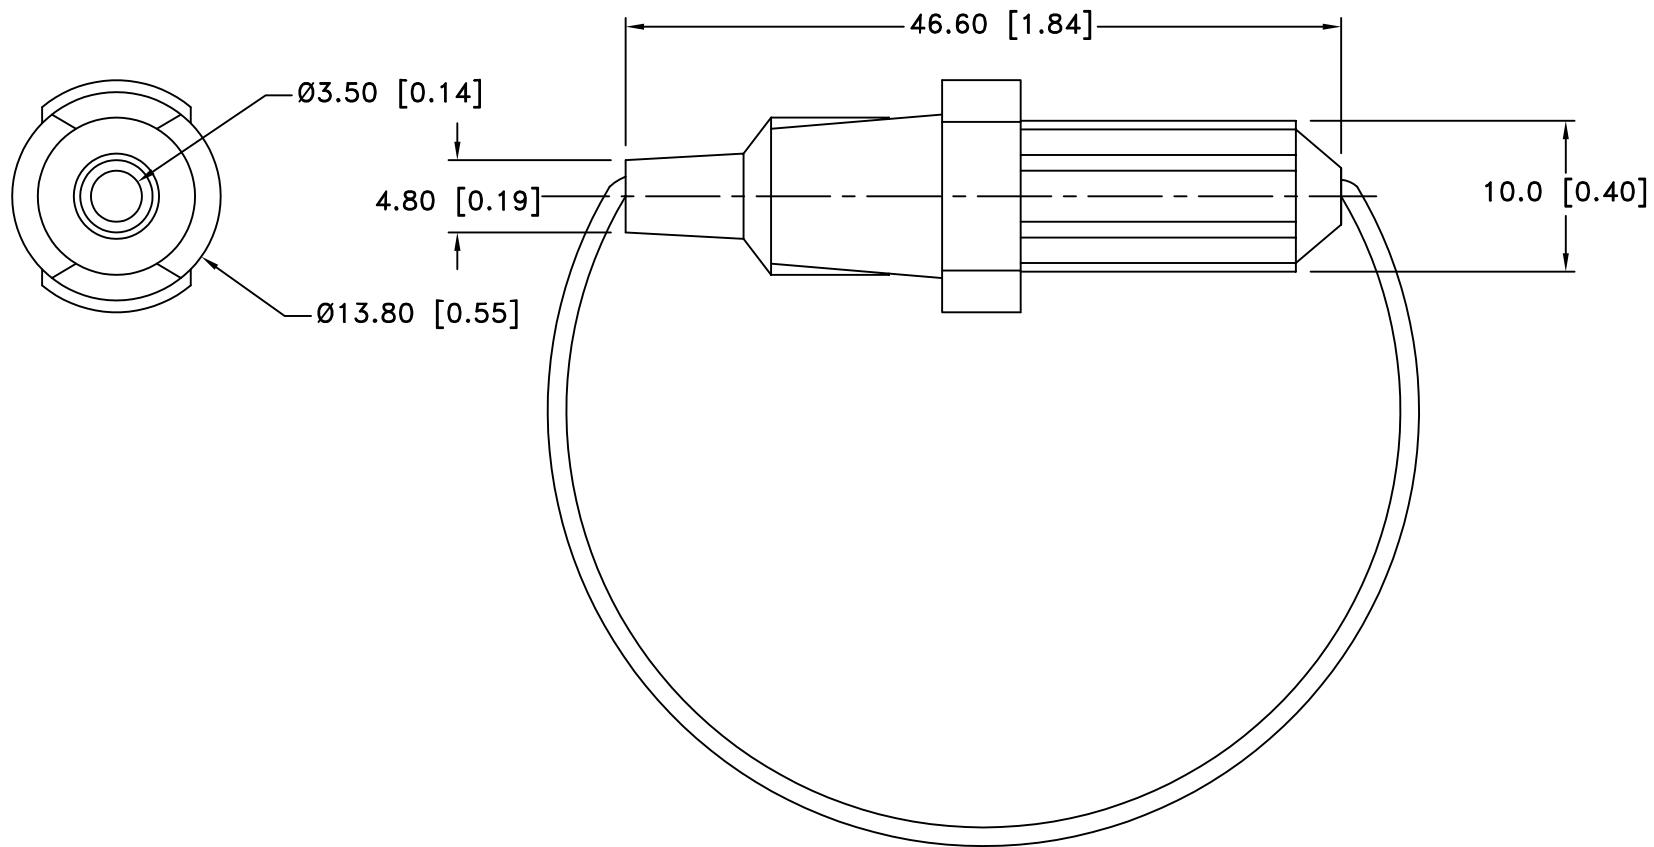

NOTES:

- MATERIAL:
HOUSING : NYLON, UL 94V-2, FILE NO. E41797(M)
 - LEAD WIRE IN LOOP: 16AWG, UL-CSA, 105°C, TOTAL LENGTH 8.125"
 - MAXIMUM CURRENT: 10A
 - INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
 - CONTACT RESISTANCE: 5MΩ AT 1A DC
 - DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title FUSED POWER CORD W/PLASTIC INLINE FUSE HOLDER		
Angular ± 3°	Date 02/29/08	Drawing Number BF303	